

By Les Simmonds



Fibre optics vs coaxial cable

This is the eleventh in a series of objective video testing articles where we will test a Digital 4 Channel Video Fibre Optic Video Multiplexer over 100 kilometres of fibre and compare its performance with 150 metres of high quality RG59/U coaxial cable.

WE'RE going to conduct a performance shoot-out between the Australian designed and manufactured Optical Systems Design (OSD) OSD 870 Digital 4 Channel Video Fibre Optic Video Multiplexer and Belden 1505F RG59/U Precision Video Coaxial Cable. There are some important lessons to be learned from this test – one being that coaxial cable loses appreciable performance over just 75 metres.

Important for integrity, our shoot-out will include video

signal tests from the European Video Transmission Standard EN 50132-5:2001 which applies to both transmission technologies.

This European Standard specifies the minimum requirements for the specification and testing of the performance of a video transmission channel involving transmitter, receiver or intermediate devices associated with the selected transmission media, for use in CCTV surveillance systems. It covers the transmission of

colour and black and white video signals in accordance with CCIR Report 624-4, 625 lines, 50 fields per second.

The protagonists

The Optical Systems Design OSD 870 Digital 4 Channel Video Fibre Optic Video Multiplexer system has a video bandwidth in excess of 10 MHz per channel, a signal-to-noise-ratio greater than 67 dB, uses uncompressed 10 bit video encoding which allows for broadcast studio quality video transmission and has a built in video equalising amplifier for each video channel on the transmitter to compensate for coaxial cable losses prior to the OSD 870 input. The OSD 870 operating distance may be doubled to 200 kilometres if the OSD 870 receiver is supplied with an Avalanche Photodiode Detector (APD).

Meanwhile, Belden's 1505F RG59/U Precision Video Coaxial Cable is the RG59/U used around broadcast and professional studios when RG59/U coaxial cable is required. The Belden 1505F is superior to most of the RG59 series coaxial cable installed in CCTV installations by the security industry.

Sounds like an interesting test with 100 kilometres of optical fibre up against 150 metres of coaxial cable doesn't it! Well it gets a lot more interesting as the test unfolds. The results also give us serious cause to question the majority of CCTV camera manufacturers who specify their cameras as being capable of working without video equalisation up to 250 metres with RG59 series coaxial cable.

In the May 2003 issue of SEM we wrote "The displayed waveform shows approximately 2.7 dB pre-

emphasis at 5 MHz which would be required to compensate for 150 metres of RG59/U coaxial cable. This image may cause some to question me and maybe even question some of the old rules of thumb used in the CCTV industry. (Source: Belden Master Catalogue – Attenuation vs. Frequency for Belden Broadband Coaxial Products).

Into the bargain, we've always disputed the industry RG59/U coaxial cable rule of thumb of 200 or 250 metres without an outboard or in camera equalising amplifier. Having carried out these objective tests we are even more concerned, as it appears

obvious that 75 metres may turn out to be the RG59/U coaxial cable limit without video equalisation to maintain a satisfactory colour video image.

The test scenario

First we set up the single mode fibre optical attenuation at 27 dB loss which represents a loss over single mode fibre equivalent to 108 kilometres based on 0.25 dB loss per kilometre which is a very generous figure. For example, Corning specifies 0.20 to 0.22 dB per kilometre for their SMF-28e single mode optical fibre when operated at 1550 nm. Based on Corning's maximum loss of 0.22 dB per kilometre at 1550 nm this test was carried out over 122 kilometres.



The optical attenuation methodology we used is the standard optical attenuation for such tests and we have no doubt that we were working over more than 100 kilometres with the OSD 870

comparison 150 metres of precision RG59/U coaxial cable showed; low video level, rounding of the greyscale steps and horizontal sync pulse which indicated loss of high frequency response (more of

"The results also give us serious cause to question the majority of CCTV camera manufacturers who specify their cameras as being capable of working without video equalisation up to 250 metres with RG59 series coaxial cable."

and the single mode fibre for this test.

The test setup complied with the European Video Transmission Standard EN 50132-5:2001. We connected the test signal generator to input one on the OSD 870 transmitter and our oscilloscope, waveform monitor and recording equipment to output one of the OSD 870 receiver. The RG59/U coaxial cable was connected in the same manner to the single coaxial cable input and single coaxial cable output.

The OSD 870 fibre optic system displayed the 5 Step Greyscale very similar to the output of the test signal generator. Hold on! That's after 100 kilometres of digital video transmission! In

that later) and probably the most serious problem - the colour burst at 4.43 MHz is reduced from 300 mV to just 229 mV. This result related to the loss of high frequency response.

When we switched to Multiburst we found the OSD 870 fibre optic system over 100 kilometres displayed Multiburst with a very slight high frequency emphasis of about +0.3 dB at 4.8 MHz. In comparison 150 metres of coaxial cable showed a loss of about -3.0 dB at 4.8 MHz which is the second burst from the right. The 0.5 MHz to 6 MHz sweep displayed the same characteristics as the Multiburst, but shows all frequencies between the bursts. The markers on the OSD 870 waveform are set at 1

MHz, 2 MHz, 3 MHz, 4 MHz, 5 MHz and 6 MHz and we didn't switch the oscilloscope to all lines to show the markers on the coaxial cable waveform. That's what can happen when you get too excited about the test results during a test.

The Modulated 20T Pulse is a tough call for any video system, but the OSD 870 fibre optic system over 100 kilometres was almost perfect while the coaxial cable system showed a video level loss (video level at 580 mV) and low chrominance to luminance amplitude displayed as the arch at the bottom of the Modulated 20T




Pulse. The OSD 870 fibre optic system over 100 kilometres displayed an almost perfect 2T Pulse while the 150 metres of coaxial cable showed some problems on the right side of the 2T Pulse.

We have also included a close up of the colour burst for 150 metres of RG59/U coaxial cable which clearly shows the reduction of colour burst level to 229 mV from the PAL standard and accepted


good engineering practice colour burst level of 300 mV. It should be noted that coaxial cable has no electronics so all video signal losses are directly related to the cable only.

The test showed the OSD 870


CONTINUED ON PAGE PAGE 32

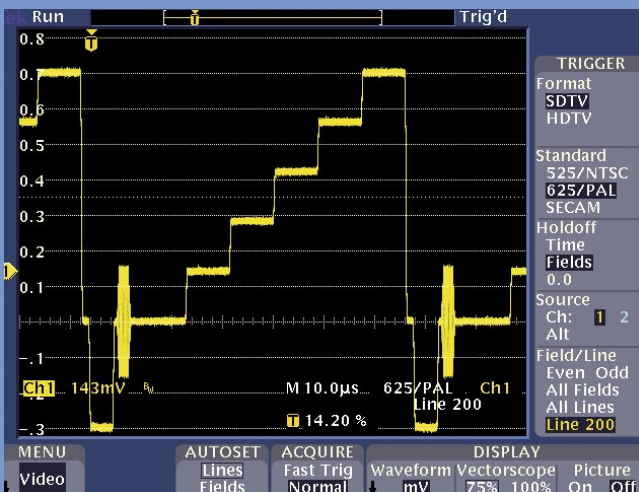


* OSD 870 fibre optic system 5 Step Greyscale waveform which is very similar to the output of the test signal generator.

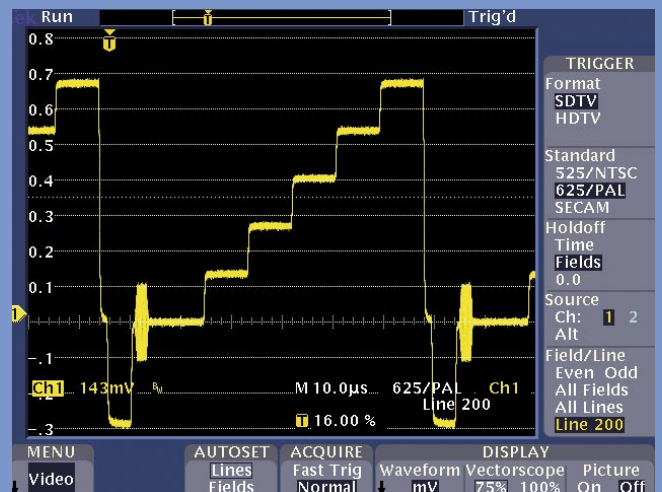


* RG59/U coaxial cable 5 Step Greyscale waveform showing low video level, rounding of the greyscale steps and horizontal sync pulse and low colour burst.

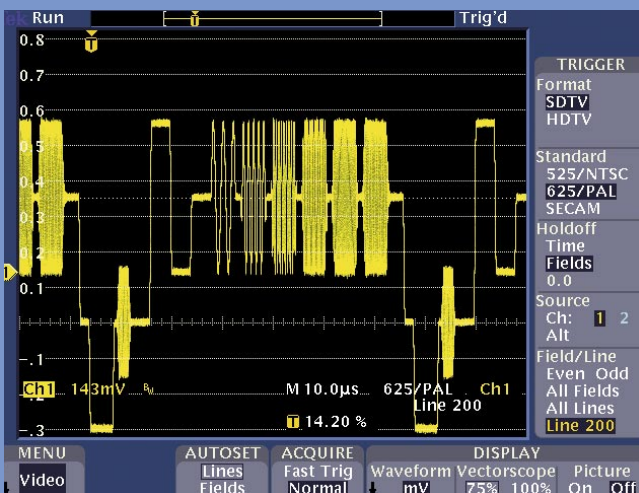


* OSD 870 fibre optic system Multiburst waveform frequencies of 0.5 MHz, 1.0 MHz, 2.0 MHz, 4.0 MHz, 4.8 MHz and 5.8 MHz with the 4.8 MHz burst at about +0.3 dB.

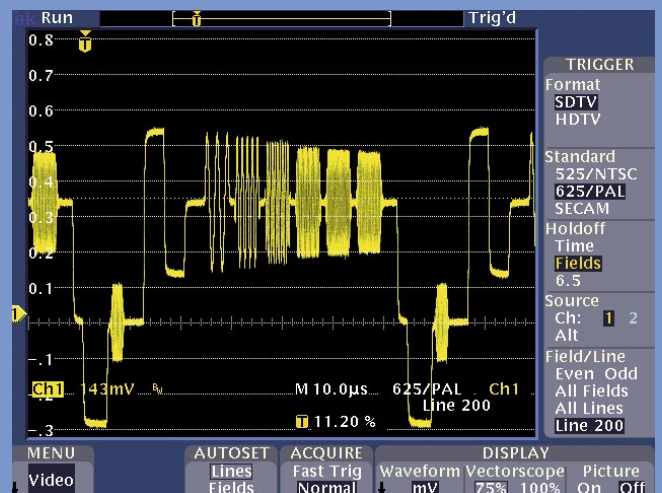


*RG59/U coaxial cable Multiburst waveform frequencies of 0.5 MHz, 1.0 MHz, 2.0 MHz, 4.0 MHz, 4.8 MHz and 5.8 MHz with the 4.8 MHz burst at about -3.0 dB.at.

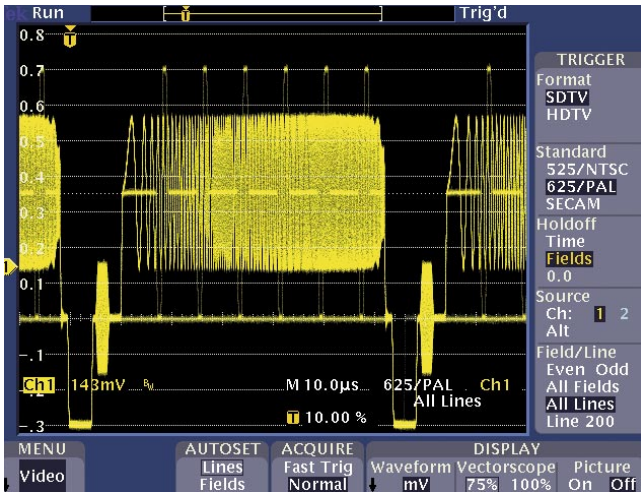


* OSD 870 fibre optic system 0.5 MHz to 6 MHz Sweep waveform with markers set at 1 MHz, 2 MHz, 3 MHz, 4 MHz, 5 MHz and 6 MHz with the 5 MHz at about +0.3 dB.

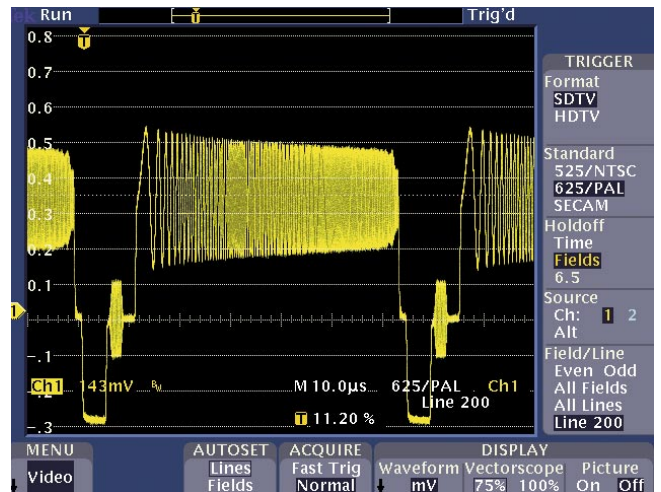


* RG59/U coaxial cable 0.5 MHz to 6 MHz Sweep waveform with no markers showing 5 MHz at about -3.0 dB.

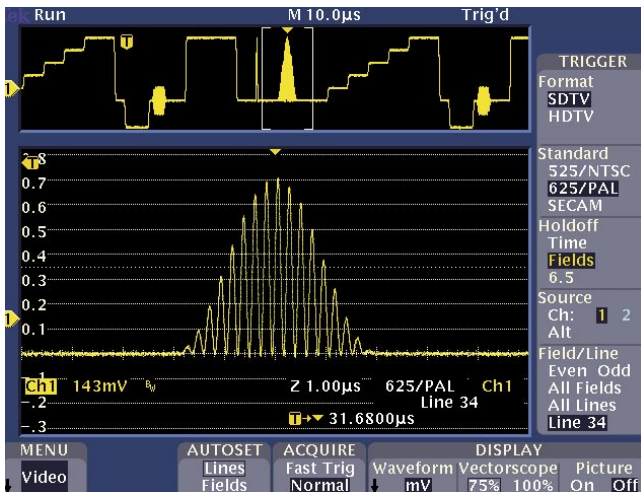


* OSD 870 fibre optic system Modulated 20T Pulse waveform with an almost perfect result.

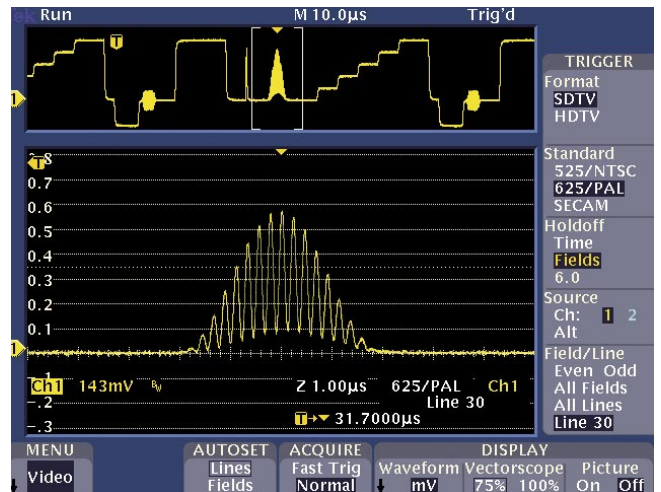

* RG59/U coaxial cable Modulated 20T Pulse waveform showing level loss and low chrominance to luminance amplitude.

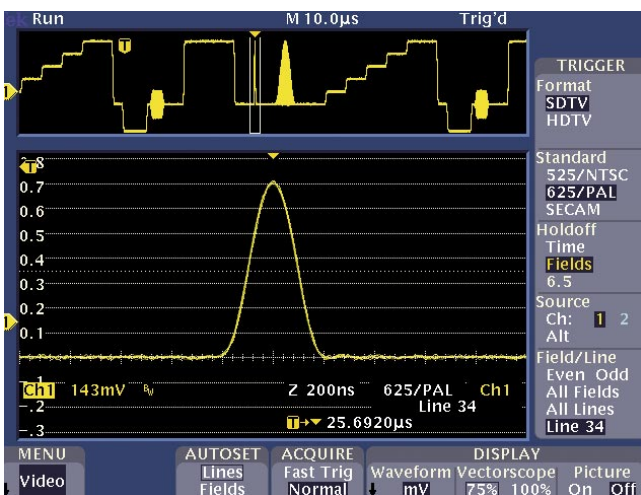

* OSD 870 fibre optic system 2T Pulse waveform with an almost perfect result.

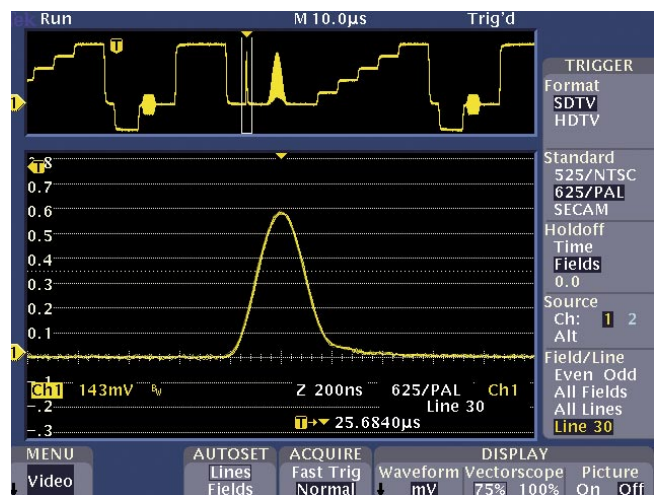

* RG59/U coaxial cable 2T Pulse waveform showing low level and problems on the right hand side of the 2T Pulse.

fibre optic system is a credit to Optical Systems Design's MD John Wise and the design engineers responsible for its development.

This issue has been devoted to a shootout between 100 kilometres of OSD digital video fibre optic transmission and 150 metres of high quality Belden RG59/U coaxial cable transmission equipment. The test shows that a fibre optic transmission system is well worth the few extra dollars it costs for any video transmission over 75 metres.

In the first issue next year we may test some high quality, easy to install and low cost CCTV cameras which are expected to be released in Australia during January 2004.


Acknowledgements:

Optical Systems Design Pty Ltd

Web site: www.osd.com.au.

Les Simmonds is an independent electronic security consultant and video testing authority.

Email: lessimmo@bigpond.net.au

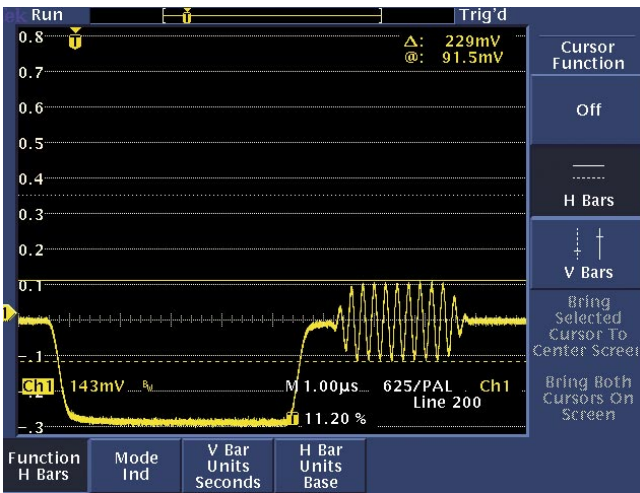

* RG59/U coaxial cable waveform showing low colour burst level of 229 mV.